

# POWER

## LCM1500

1500 Watt Bulk Front End

### Data Sheet

**Total Power:** 1500 W  
**# of Outputs:** Single  
**Outputs:** 12 V to 48 V  
Optional 5.0 V standby

### SPECIAL FEATURES

- 1500 W output power
- Low cost
- 2.5" x 5.2" x 10.0"
- 12 Watts per cubic inch
- Industrial/Medical safety
- -40 °C to 70 °C with derating
- Optional 5 V @ 2 A housekeeping
- High efficiency: 89% typical
- Variable speed "Smart Fans"
- DSP controlled
- Conformal coat option
- ± 10% adjustment range
- Margin programming
- OR-ing FET
- 80 PLUS® certified (Q model)

### COMPLIANCE

- EMI Class A
- EN61000 Immunity
- RoHS 2

### SAFETY


- ULcUL Recognized ITE (UL60950-1)
- ULcUL Recognized Medical (ANSI/AAMI ES60601-1)
- TUV-SuD ITE + Medical (EN60950-1 and EN60601-1)
- CE LVD (EN60950-1 + RoHS)
- BSMI
- CB Report
  - through Demko for IEC60950-1
  - through TUV-SuD for IEC60601-1

\*\* LCM1500 tested according to the medical standard IEC 60601-1-2 4th Edition.



### Electrical Specifications

Input	
Input range	90 - 264 Vac (Operating) 115/230 Vac (Nominal) TERMINAL BLOCK
Frequency	47 - 440 Hz, Nominal 50/60
Input fusing	Internal 30 A fuses, both lines fused
Inrush current	≤ 25 A peak, either hot or cold start
Power factor	0.99 typical, meets EN61000-3-2
Harmonics	Meets IEC 1000-3-2 requirements
Input current	18 A RMS max input current, at 100 Vac
Hold up time	14 ms minimum for main O/P, at full rated load
Efficiency	> 91% typical at full load / 230 Vac nominal (48V version)
Leakage current	< 300 µA @ 240 Vac
ON/OFF power switch	N/A
Power line transient	MOV directly after the fuse
Isolation	PRI-Chassis 2500 Vdc Basic PRI-SEC 4000 VAC Reinforced 2xMOPP SEC-Chassis 500 Vdc

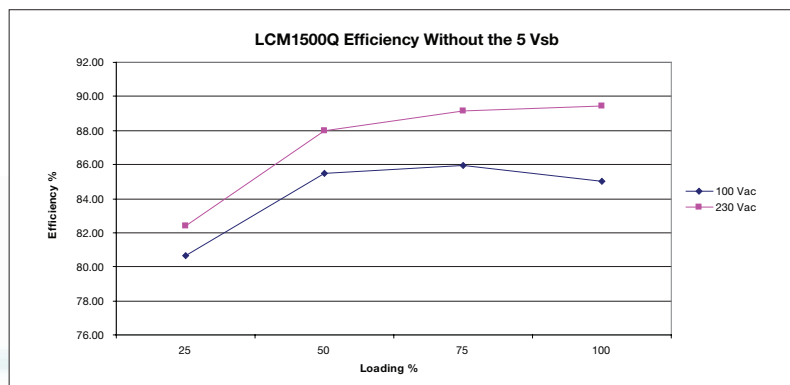

## Electrical Specifications

Output		
Output rating	See table 1	90 - 264 Vac
Set point	± 0.5%	90 - 264 Vac
Total regulation range	Main output ± 2% 5 Vsb	Combined line/load/transient when measured at output terminal
Rated load	1500 W maximum	Derate linear to 50% from 50 °C to 70 °C
Minimum load	Main output @ 0.0 A 5 Vsb @ 0.0 A	No loss of regulation
Output noise (PARD)	1% max p-p 50 mV max p-p	Main output 5 Vsb output Measured with a 0.1 µF Ceramic and 10 µF Tantalum Capacitor on any output, 20 MHz
Output voltage overshoot		No overshoot/undershoot outside the regulation band during on or off cycle
Transient response	< 300 µSec	50% load step @ 1 A/µs Step load valid between 10% to 100% of output rating Recovery time to within 1% of set point at onset of transient
Max units in parallel		Up to 4
Short circuit protection	Protected, no damage to occur	Bounce mode
Remote sense		Compensation up to 500 mV
Output isolation		Standard per safety requirements
Forced load sharing	To within 10% of all shared outputs	Analog sharing control
Overload protection (OCP)	105% to 125% 120% to 170%	Main output 5 Vsb output
Overvoltage protection (OVP)	125% to 145% 110% to 125%	12 V output 5 Vsb output
Overtemp protection	10 - 15 °C above safe operating area	Both PFC and output converter monitored

## Environmental Specifications

<b>Operating temperature</b>	-40 °C to +70 °C, linear derating to 50% from 50 °C to 70 °C
<b>Storage temperature</b>	-40 °C to +85 °C
<b>Humidity</b>	10 to 90%, non-condensing. Operating. Conformal coat option available.
<b>Fan noise</b>	< 45 dBA, 80% load at 30
<b>Altitude</b>	Operating - 16,405 feet (5,000 m) Storage - 30,000 feet
<b>Shock</b>	MIL-STD-810F 516.5, Procedure I, VI. Storage
<b>Vibration</b>	MIL-STD-810F 514.5, Cat. 4, 10. Storage

## Pin Assignment


Signals	Name Description	Pin Number(s)
+Vout	Power rail	SK4
GND	Power GND	SK5
Signals	Name Description	SK2 Pin Number
A2	EEPROM Address	1
-VPROG	Return connection of external supply for Margin Programming	2
A1	EEPROM Address	3
-Vsense	Remote Sense Return	4
ISHARE	Load share voltage	5
A0	EEPROM Address	6
SDA1	Serial Data Signal (I2C)	7
+VPROG	Positive connection of external supply for Margin Programming	8
SCL1	Serial Clock Signal (I2C)	9
+Vsense	Remote Sense Positive	10
5VSB	5 V standby	11
GND	5 V standby Return	12
5VSB	5 V standby	13
G_DCOK_C	Global DCOK Collector	14
GPIOA6	EEPROM Write Protect	15
G_DCOK_E	Global DCOK Emitter (GND)	16
GND	Return Ground for output signal and I2C communication	17
G_ACOK_C	Global ACOK Collector	18
INH_EN	Turn Off Main Output	19
G_ACOK_E	Global ACOK Emitter (GND)	20

**Note:** Mating connector for SK2 is:


LANDWIN: PN 2050S2000 Housing and PN 2053T021V Contact

CIVILUX: PN C10120SD000 Housing and PN C101TD21PE0 Contact

JST: PN PHDR-20VS housing and PN: SPHD-001T-P0.5

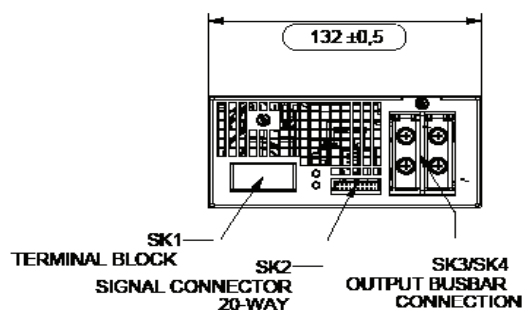

PSU Front View (24V & 48V UNITS)

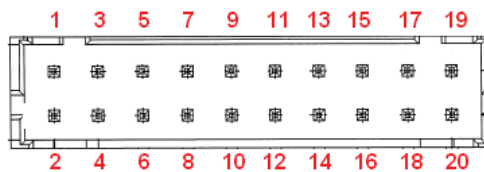

Signal Output Signal Connectors (SK2)

JST: PN PHDR-20VS housing and PN: SPHD-001T-P0.5

### LED INDICATORS

2 provided are clearly visible up to a 45 degree offset from vertical with office environment ambient lighting. The status is reflected in the indicator color.

**The DC\_OK LED** shall light green if the DC output is within specification, and shall be off if the output falls out of specification.

**The AC\_OK LED** is green if the AC is within specification and off when out of specification.

### CONTROL SIGNALS

**AC\_OK** Open collector 0.5 V maximum at 10 mA. Both emitter and collector access provided.

**DC\_OK** Open collector 0.5 V maximum at 10 mA. Both emitter and collector access provided.

**PS\_INHIBIT/ENABLE Signal** 0.0 - 0.5 V contact closure, output OFF

### Ordering Information Table 1

Model Number*	Output	Nominal Output Voltage Set Point	Set Point Tolerance	Adjustment Range	Current		Output Ripple P/P (0-50 °C)	Max Continuous Power	Combined Line/Load Regulation
					Min	Max			
LCM1500L	12 V	12 V	±0.5%	10.8 - 13.2 V	0 A	133 A	120 mV	1500 W	2%
LCM1500N	15 V	15 V	±0.5%	13.5 - 16.5 V	0 A	100 A	150 mV	1500 W	2%
LCM1500Q <sup>1</sup>	24 V	24 V	±0.5%	21.6 - 26.4 V	0 A	67 A	240 mV	1500 W	2%
LCM1500R	28 V	28 V	±0.5%	25.2 - 30.8 V	0 A	53 A	280 mV	1500 W	2%
LCM1500U	36 V	36 V	±0.5%	32.4 - 39.6 V	0 A	43 A	360 mV	1500 W	2%
LCM1500W	48 V	48 V	±0.5%	43.2 - 52.8 V	0 A	33 A	480 mV	1500 W	2%

<sup>1</sup>80 PLUS® certified


### Ordering Information Table 2

LCMXXXXY	-	A	-	B	-	C	-	###
Case Size		Input Termination		Acoustic Noise		Option Codes*		Hardware Code
1-Phase input where XXXX =								
1500 = 2.4" x 5.0" x 10.0", 1500 W				Blank = Standard		Blank = No Options		Factory Assigned for Modified Standards
		T = Terminal Block				1 = Conformal Coat		
Voltage Code Y =						2 = Reverse Air		
Code						3 = Opt 1 + 2		
L	12					4 = 5V Standby		
N	15					5 = Opt 1 + 4		
Q	24					6 = Opt 2 + 4		
R	28					7 = Opt 1 + 2 + 4		
U	36					8 = Constant Current		
W	48					9 = Opt 1 + 8		
						B = Opt 2 + 8		
						C = Opt 1 + 2 + 8		
						D = Opt 4 + 8		
						E = Opt 1 + 4 + 8		
						F = Opt 2 + 4 + 8		
						G = Opt 1 + 2 + 4 + 8		

\*Some option code combinations may not be configured yet and will require extra leadtime the first time they are requested.



Mechanical Drawings (LCM1500Q-T, LCM1500R-T, LCM1500U-T and LCM1500W-T)



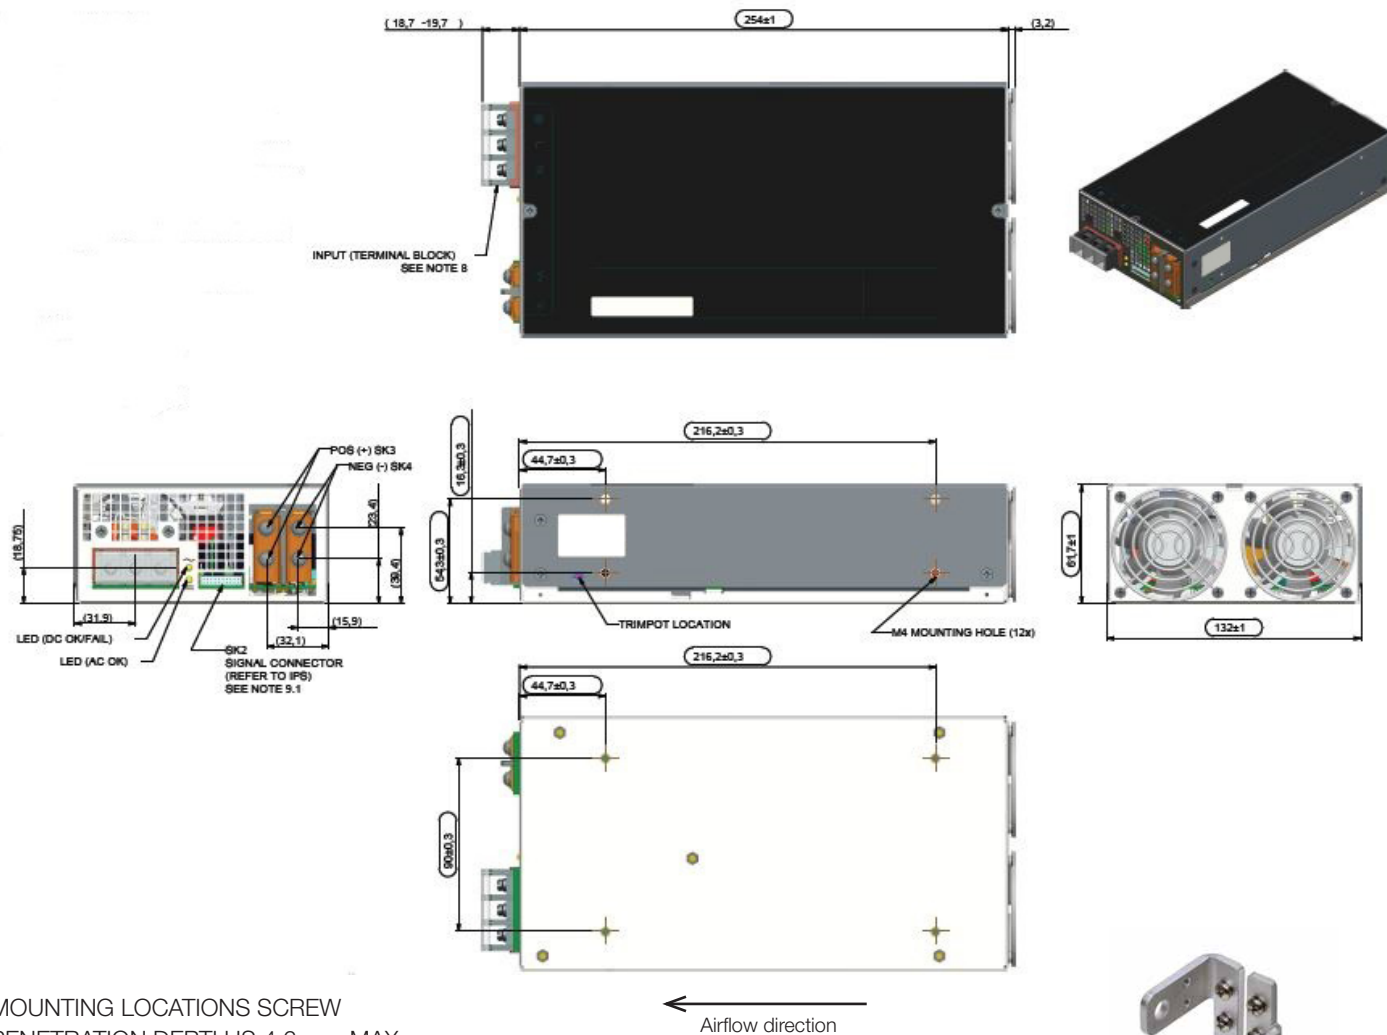


MOUNTING LOCATIONS SCREW PENETRATION DEPTH IS 4.6 mm MAX.

RECOMMENDED SCREW TORQUE:  
 M3.5 x 0.6P = 6 - 8kgf-cm  
 M4.0 x 0.7P = 8 - 10kgf-cm




Mechanical Drawings (LCM1500L-T and LCM1500N-T)

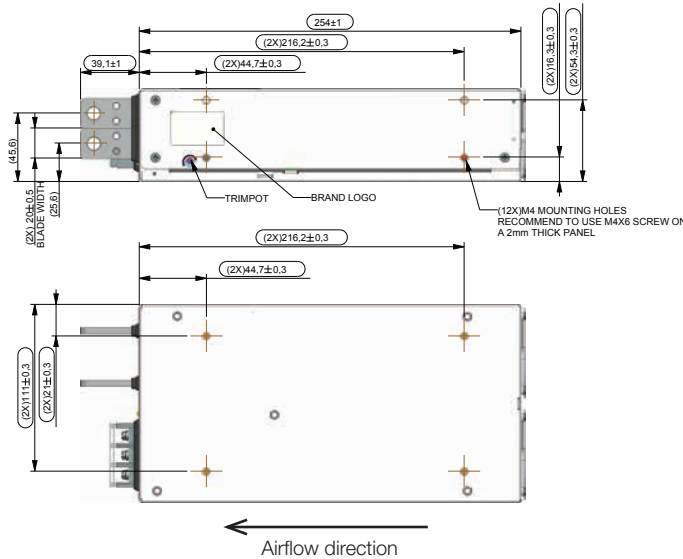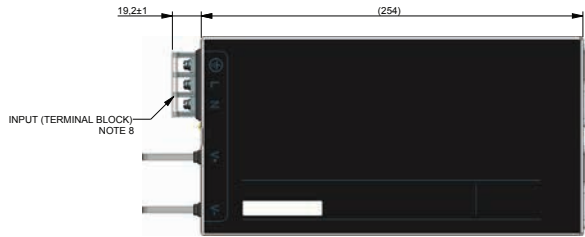


- Notes:
- Parts must be completely assembled.
  - For label printing details, refer to ips.
  - Quality controlled dimensions. These dimensions to be included in the mechanical cpk of 1.33
  - Casing parts used must have matching color. In order to ensure color matching of parts, it is required that the raw material that will be processed by the fabricator will come from the same supplier and the sheetmetal fabricator for all matching parts must be the same. To avoid color variations on the same lot delivered, all parts with matching color requirement should be delivered as a set by the fabricator.
  - Sheared edges visible to the customer should have no rust formation. If rust formation is present then a concealing layer of silver ink or some other substitute should be applied on the rusted area.
  - Mounting locations screw penetration depth is 4.6Mm max.
  - Recommended screw torque:  
M3.5X0.6P = 6-8kgf-cm  
M4.0X0.7P = 8-10kgf-cm
  - Input: terminal block type. M4 screw torque value of 16kgf-cm using wire gauge 18-10 (13mm centers)
  - Suitable mating connectors:  
9.1 For sk2:  
A) 764-002569-0000 mat-kit hsg-20way (landwin)  
451-004792-0000 Hsg-dr 20ckt (lwe pn: 2050s2000)  
451-000709-0000 Crimp term (lwe pn: 2053t021v)  
B) 764-003275-0000 mat-kit hsg-20way (civilux)  
451-004793-0000 Hsg-20way (cx pn: ci0120sd000)  
451-000703-0000 Term-#22~28 (cx pn: ci01td21pe0)

## Accessories

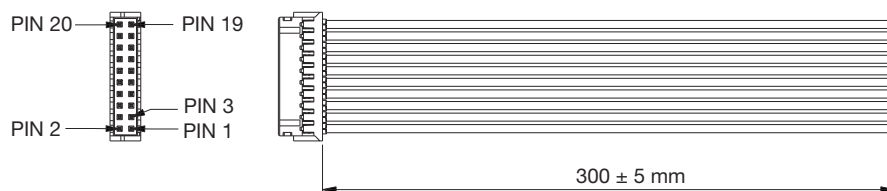

Order kit part number 73-788-001 for control connector interface with .3m wires attached

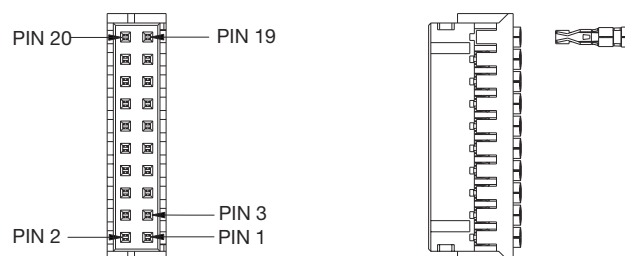

Order kit part number 73-788-002 for control connector interface with unloaded housing and 20 pins

## Miscellaneous Specifications

### BURN-IN

100% Burn-in at 45 °C, at 80 - 90 % load. Duration of burn-in determined by Quality Assurance Procedures.

### MTBF

The power supply has a minimum MTBF of 300K hours using the Bell core 332, issue 6 specification @ 25 °C and 40 °C, ambient, at full load. With the power supply installed in a system in a 25 °C ambient environment and operating at full load, capacitor life shall be 10 years, minimum for ALL electrolytic capacitors contained within this power supply. The power supply shall demonstrate a MTBF level of > 500,000 hours.

### QUALITY ASSURANCE

Full QAV testing shall be conducted in accordance with Artesyn Embedded Technologies Standards with reports available upon request.

### WARRANTY

Artesyn Embedded Technologies shall warrant the power supply to be free of defects in materials and workmanship for a minimum period of three years from the date of shipment, when operated within specifications. The warranty shall be fully transferable to the end owner of the equipment powered by the supply.

## WORLDWIDE OFFICES

### Americas

2900 S.Diablo Way  
Tempe, AZ 85282  
USA  
+1 888 412 7832

### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
+44 (0) 1384 842 211

### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333

**ARTESYN**<sup>™</sup>  
EMBEDDED TECHNOLOGIES

[www.artesyn.com](http://www.artesyn.com)